


z8817
RF Front End Module
PXI



Port Descriptions

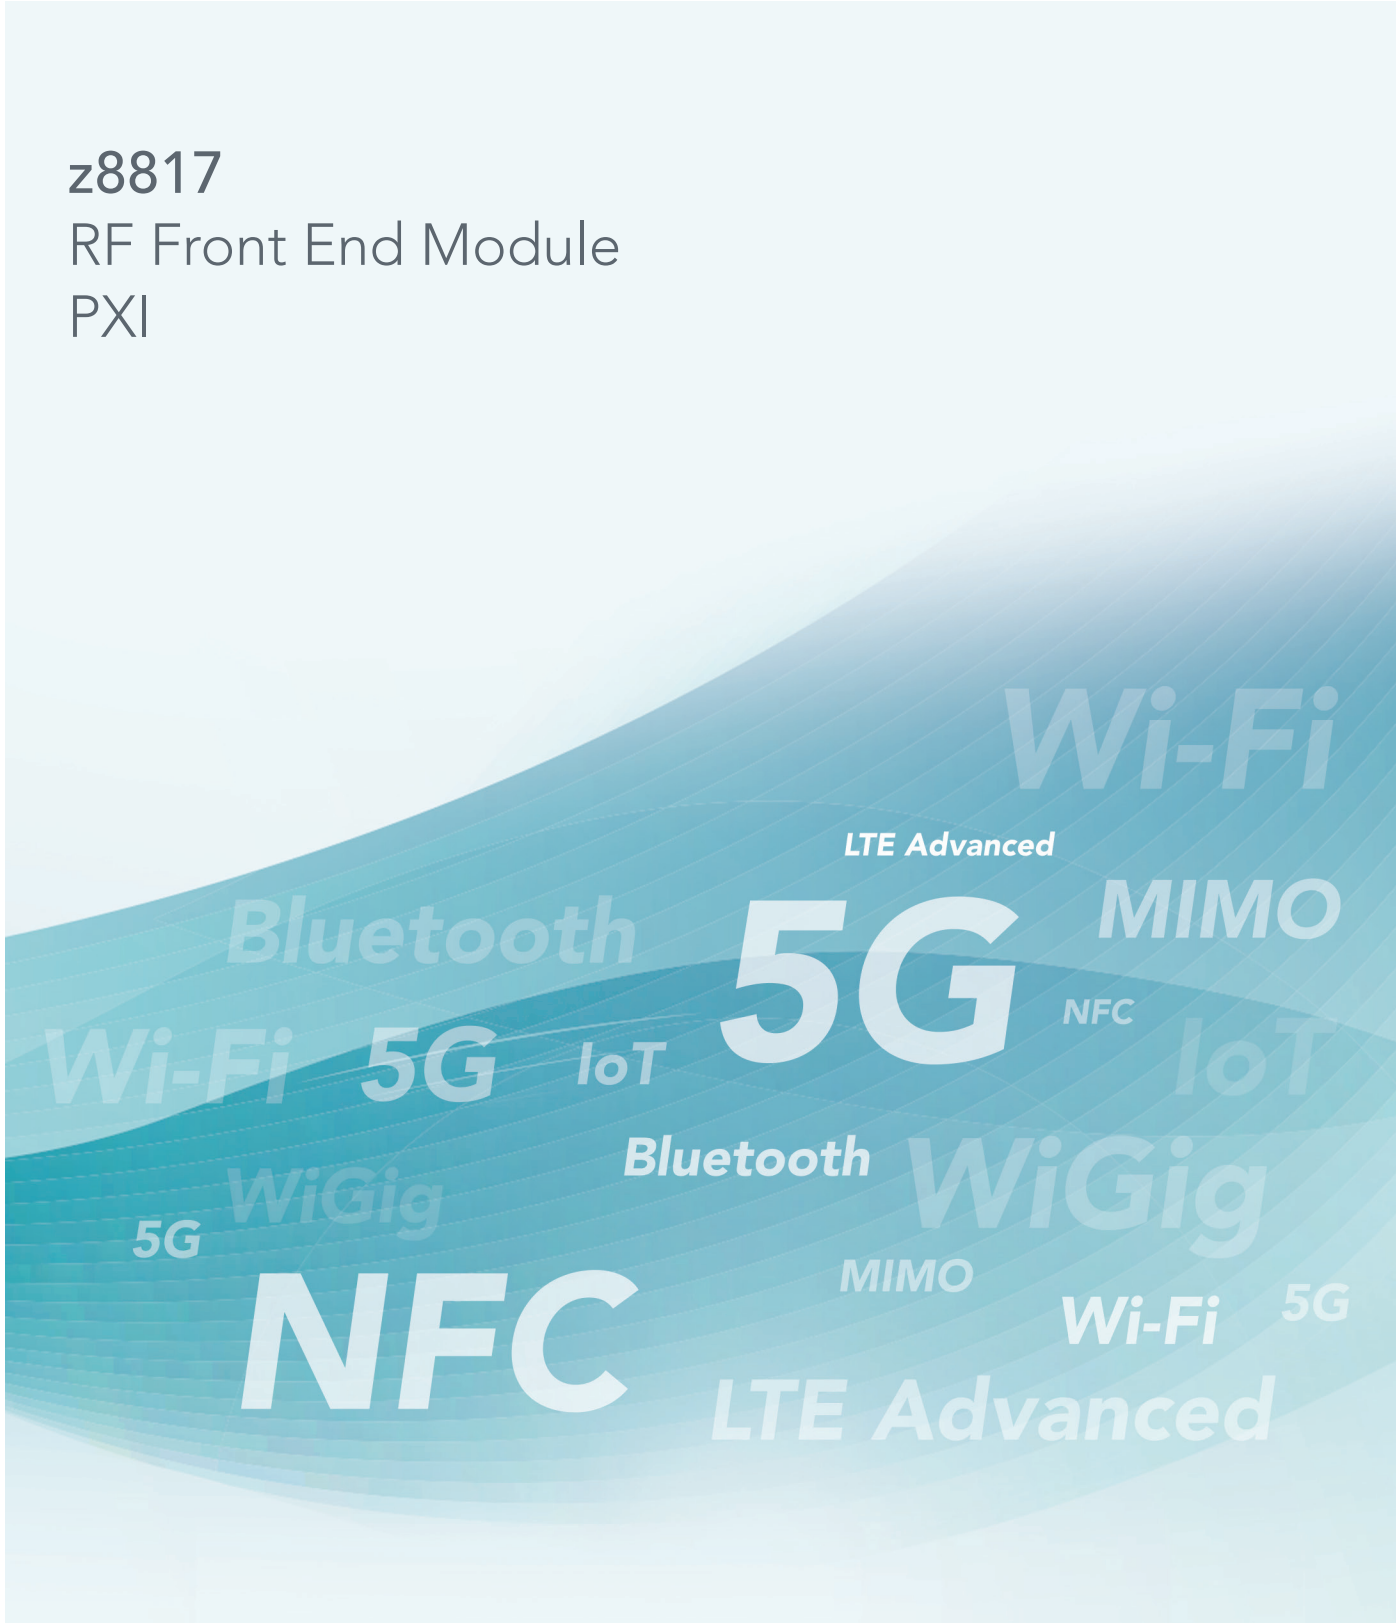

Front Panel

Label	Type	Description
RF 1 IN	SMA	RF1 Input
RFT/R IN/OUT	SMA	RF Transmit/Receive
RF2 OUT	SMA	RF2 Output

RF Input

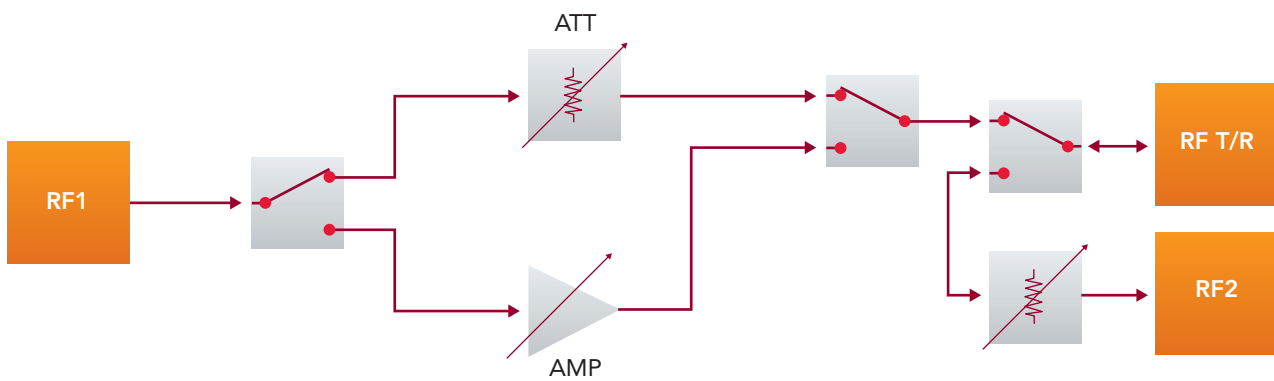


Figure 1: Simplified Block Diagram Showing RF Channels

RF1 Input

Specification	Value
Input Impedance	50 Ω
Frequency Range	250 MHz to 7.2 GHz, nominal to 7.5 GHz
Input VSWR (typical) Attenuator Path @ 0 dB 250 MHz to 1 GHz 1 GHz to 3 GHz 3 GHz to 7.2 GHz Attenuator Path (10 dB ATT) 250 MHz to 3 GHz 3 GHz to 7.2 GHz Amplifier Path 250 MHz to 2 GHz 2 GHz to 7.2 GHz	 $\leq 1.92:1$ (-10 dB RL) $\leq 1.43:1$ (-15 dB RL) $\leq 1.92:1$ (-10 dB RL) $\leq 1.43:1$ (-15 dB RL) $\leq 1.92:1$ (-10 dB RL) $\leq 1.43:1$ (-15 dB RL) $\leq 1.92:1$ (-10 dB RL)
Gain Range (typical) Attenuator / Amplifier Path 250 MHz to 2 GHz 2 GHz to 6 GHz 6GHz to 7.2 GHz	 -33 to +20 dB -34 to +17 dB -37 to +13 dB
Gain Accuracy @ 25C	$\leq \pm 0.5$ dB, $\leq \pm 0.25$ dB (typical)
Gain Temperature Drift	< -0.01 dB/ $^{\circ}$ C
Gain Switching Speed	< 1 ms
Absolute Maximum Input (no damage)	+25 dBm
Connectors	SMA

RF T/R Input

Specification	Value
Input Impedance	50 Ω
Frequency Range	250 MHz to 7.2 GHz, nominal to 7.5 GHz
Input VSWR (typical) 250 MHz to 3 GHz 3 GHz to 7.2 GHz	 $\leq 1.43:1$ (-15 dB RL) $\leq 1.92:1$ (-10 dB RL)
Gain Range (typical) Attenuator OFF Attenuator ON	 0 dB - Insertion Loss -10 dB - Insertion Loss
Gain Accuracy @ 25C	$\leq \pm 0.5$ dB
Gain Temperature Drift	< -0.01 dB/ $^{\circ}$ C
Gain Switching Speed	< 1 ms
Absolute Maximum Input (no damage)	+30 dBm
Connectors	SMA

RF Output

RFT/R Output

Specification	Value
Output Impedance	50 Ω
Frequency Range	250 MHz to 7.2 GHz, nominal to 7.5 GHz
Output VSWR (typical) 250 MHz to 7.2 GHz	$\leq 1.92:1$ (-10 dB RL)
Maximum Output Power (typical)	See Figure 2
Noise Figure @ max. gain	< 5 dB
OIP3 250 MHz to 7.2 GHz	+37 dBm
Connectors	SMA

RF 2 Output

Specification	Value
Output Impedance	50 Ω
Frequency Range	250 MHz to 7.2 GHz, nominal to 7.5 GHz
Output VSWR (typical) 250 MHz to 4 GHz 4 GHz to 7.2 GHz	$\leq 1.43:1$ (-15 dB RL) $\leq 1.92:1$ (-10 dB RL)
OIP3 (typical)	+36 dBm

RF T/R Typical MAX Output Power
Typical z8817 Maximum Output Power (Driven with z8752)

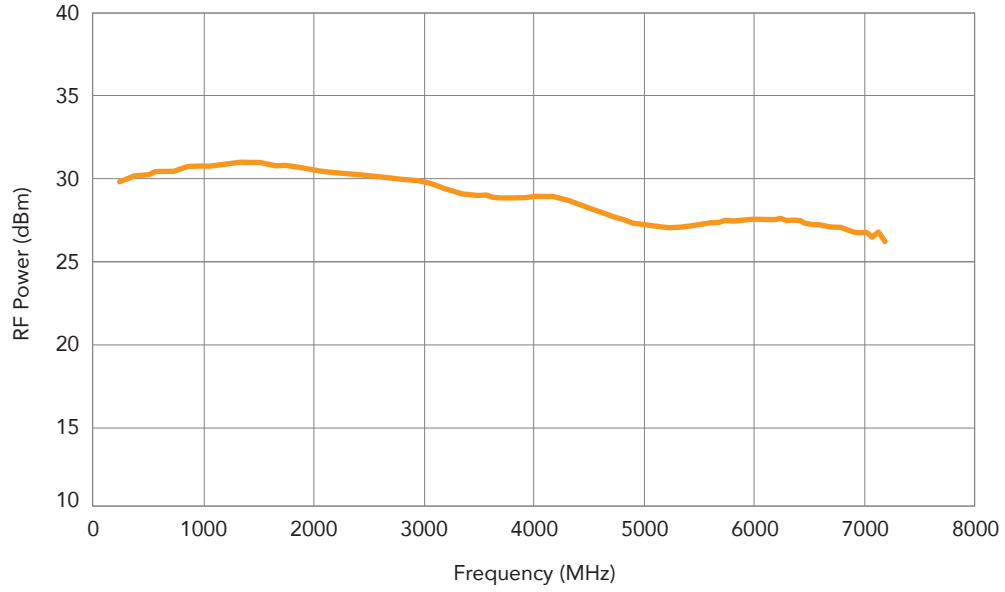


Figure 2. Typical maximum output power at Port RF T/R

RF T/R Typical Gain Accuracy
Typical z8817 RF Gain Accuracy

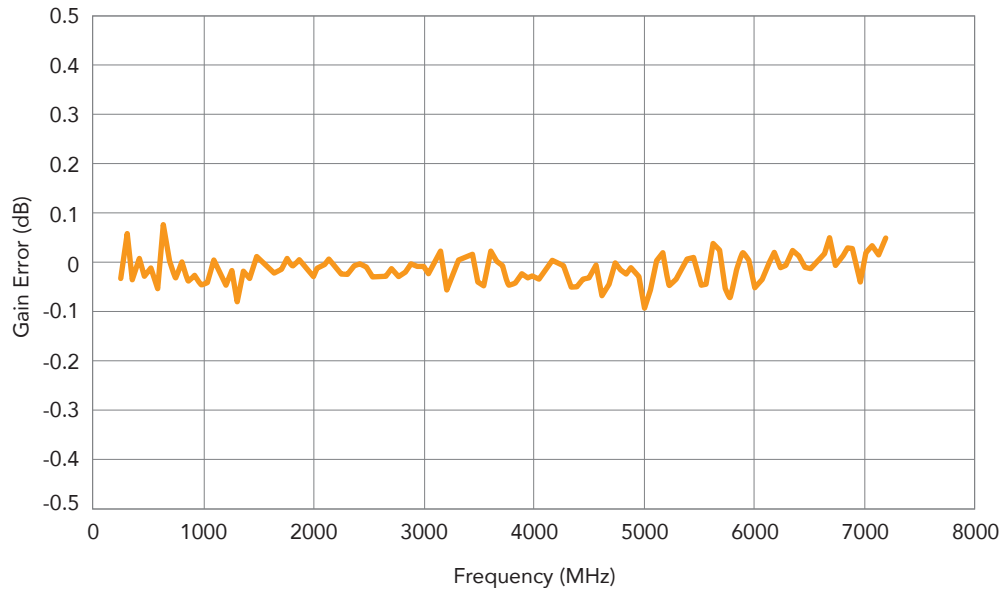


Figure 3. Typical gain accuracy at Port RF T/R

Backplane Trigger 0-7

Specification	Value
Functionality	Not supported
Direction	Input

Instrument Stored States

Specification	Value
Functionality	Non-volatile storage of instrument setup configuration
Stored States	30 State 0 is Reset State Power-On State programmable

LED Indicators

Specification	Value
RDY (Ready)	OFF: Hardware failure ON: Passed power-up self-test TOGGLE: Error pending in queue
HST (Host)	ON: Idle PULSE: Instrument Identify enabled

PXI Interface

Specification	Value
PXI Slot Compatibility	PXI Standard Slot and PXIe Hybrid Slot Compatible
PXI Timing & Triggering Signals (XJ4 Connector)	PXI_TRIG[0:7] input/output PXI_STAR input PXI_CLK10 input

Power & Cooling

Power Supplies

Platform	Voltage	Typical Current	Maximum Current
PXI	+3.3 VDC +5 VDC +12 VDC -12 VDC	0.25 A 3.12 A 0.03 A 0.00 A	0.25 A 3.33 A 0.03 A 0.00 A

Total Cooling & Power Consumption

Platform	Typical Cooling & Power	Maximum Cooling & Power
PXI	16.7 W	17.8 W

Physical & Environmental

Size & Weight

Specification	Value
Physical Size	Single-Wide 3U PXI Instrument
Dimensions	8.25" x 0.79" x 5.25" (L x W x H) 20.96 cm x 2.01 cm x 13.34 cm (L x W x H)
Weight	12.35 oz or 350 g

Temperature Range

Specification	Value
Operating	0°C to +50°C ambient (MIL-PRF28800F Class 3)
Storage	-40°C to +75°C ambient (MIL-PRF28800F Class 3)
Calibration Range	+20°C to +30 °C ambient, after 20 minute warm-up period, to meet all specification accuracies
Over-Temperature	Automatic shutdown if internal temperature exceeds +70°C

Relative Humidity

Specification	Value
Operating or Storage < +30 °C +30 °C to +40 °C > 40 °C	5 to 95 ± 5%, non-condensing 5 to 75 ± 5%, non-condensing 5 to 45 ± 5%, non-condensing

Altitude

Specification	Value
Operating	Up to 5 km
Storage	Up to 15 km

Calibration

Specification	Value
Calibration Period	12 months

Terminology

Numeric Prefixes

When referring to numeric values, this document will use SI (International System of Units) and IEC (International Electrotechnical Commission) standard prefixes. Prefix definitions are in the following table.

Prefix	Multiplier
n (nano)	$1/(1000 \times 1000 \times 1000)$
μ (micro)	$1/(1000 \times 1000)$
m (milli)	$1/1000$
k/K (kilo)	1000
M (Mega)	1000×1000
G (Giga)	$1000 \times 1000 \times 1000$
Ki (Kibi)	1024
Mi (Mebi)	1024×1024
Gi (Gibi)	$1024 \times 1024 \times 1024$

Differential Outputs

Single-Ended is used to refer to the output on either the + or – output pin

Differential is used to refer to the output between the + and- output pins

Vd indicates Volts differential

Vppd indicates Volts peak-to-peak differential

Safety

This product is designed to meet the requirements of the following standard of safety for electrical equipment for measurement, control and laboratory use: EN 61010-1

Electromagnetic Compatibility

CE Marking EN 61326-1:1997 with A1:1998 and A2:2001 Compliant

FCC Part 15 (Class A) Compliant

Emissions

EN 55011	Radiated Emissions, ISM Group 1, Class A, distance 10 m, emissions < 1 GHz
EN 55011	Conducted Emissions, Class A, emissions < 30 MHz Immunity
EN 61000-4-2	Electrostatic Discharge (ESD), 4 kV by Contact, 8 kV by Air
EN 61000-4-3	RF Radiated Susceptibility, 10 V/m
EN 61000-4-4	Electrical Fast Transient Burst (EFTB), 2 kV AC Power Lines
EN 61000-4-5	Surge
EN 61000-4-6	Conducted Immunity
EN 61000-4-8	Power Frequency Magnetic Field, 30 A/m
EN 61000-4-11	Voltage Dips and Interrupts

CE Compliance

This product meets the necessary requirements of applicable European Directives for CE Marking as follows:

73/23/EEC Low Voltage Directive (Safety)

89/336/EEC Electromagnetic Compatibility Directive (EMC)

See Declaration of Conformity for this product for additional regulatory compliance information.

Copyright © 2019 LitePoint, A Teradyne Company.

All rights reserved

RESTRICTED RIGHTS LEGEND

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual, or otherwise, without the prior written permission of LitePoint Corporation.

DISCLAIMER

LitePoint Corporation makes no representations or warranties with respect to the contents of this manual or of the associated LitePoint Corporation products, and specifically disclaims any implied warranties of merchantability or fitness for any particular purpose. LitePoint Corporation shall under no circumstances be liable for incidental or consequential damages or related expenses resulting from the use of this product, even if it has been notified of the possibility of such damages.

If you find errors or problems with this documentation, please notify LitePoint Corporation at the address listed below. LitePoint Corporation does not guarantee that this document is error-free. LitePoint Corporation reserves the right to make changes in specifications and other information contained in this document without prior notice.

TRADEMARKS

LitePoint and the LitePoint logo are registered trademarks of LitePoint Corporation. z8817 is a trademark of LitePoint Corporation. All other trademarks or registered trademarks are owned by their respective owners.

CONTACT INFORMATION

LitePoint Corporation
575 Maude Court
Sunnyvale, CA 94085-2803
United States of America

+1.866.363.1911

+1.408.456.5000

LITEPOINT TECHNICAL SUPPORT

www.litepoint.com/support

Doc: 1075-0140-001

March 2019 Rev 1